

Honeycomb blind installation guide:


Checklist: You will need the following to perform the installation.

- Drill with hammer function for masonry (with 5.5mm drill bit).
- Screwdriver (phillips)
- Measuring tape
- Marker (pencil)
- Ruler (recommended)
- Step ladder
- Spirit level (recommended)
- Hammer (not required but ideal)
- Vacuum to clean dust from drilling
- Hacksaw (not required for 25mm Aluminium)

Hanging your blind:

Step1.

Before starting you need to decide if the blind is an Inside (Recess) or Outside (Facefix) blind installation. This will determine your blind position. Remember if Inside (Recess) you should ensure the blinds will not be obstructed but obstructions like window handles or burglar bars for example.

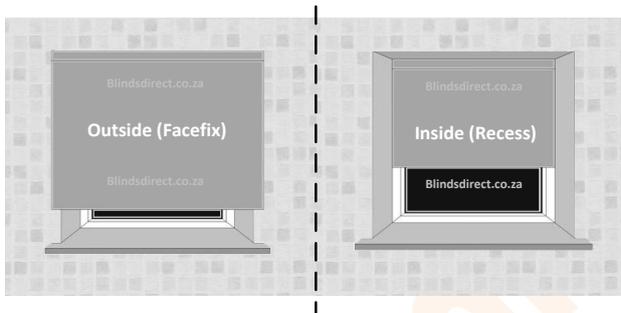

Step2.


Inside window frame (Reveal fix)

Measure the distance that any handles protrude from the frame. Mark this measurement on the lintel (top inside portion of window frame) and use it to position the back of the bracket. Mark the position of holes. Drill the holes. Then screw bracket into lintel using screws and raw plugs supplied.

OR


Outside window frame (Face Fix)

Position bracket with lip facing towards you, then proceed to mark drilling positions. Then drill the marked positions. Screw bracket in place. Use raw plugs if fitting to the wall.

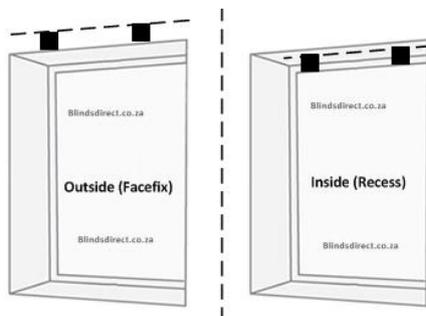

Step 3.

Mount the brackets on the headrail then snap into place. To remove headrail, simply push the release lip up with a screwdriver.

Recess FitFacefix fit**Step 4.**

Use string cord control to lift and lower the blind.

Blindsdirect.co.za